



REVISIONS					
REV	ECO	DESCRIPTIONS	DWN	CKD	APVD
1	✓	ORIGINATED FOR REV CONTROL	JNR 3/18/2002		

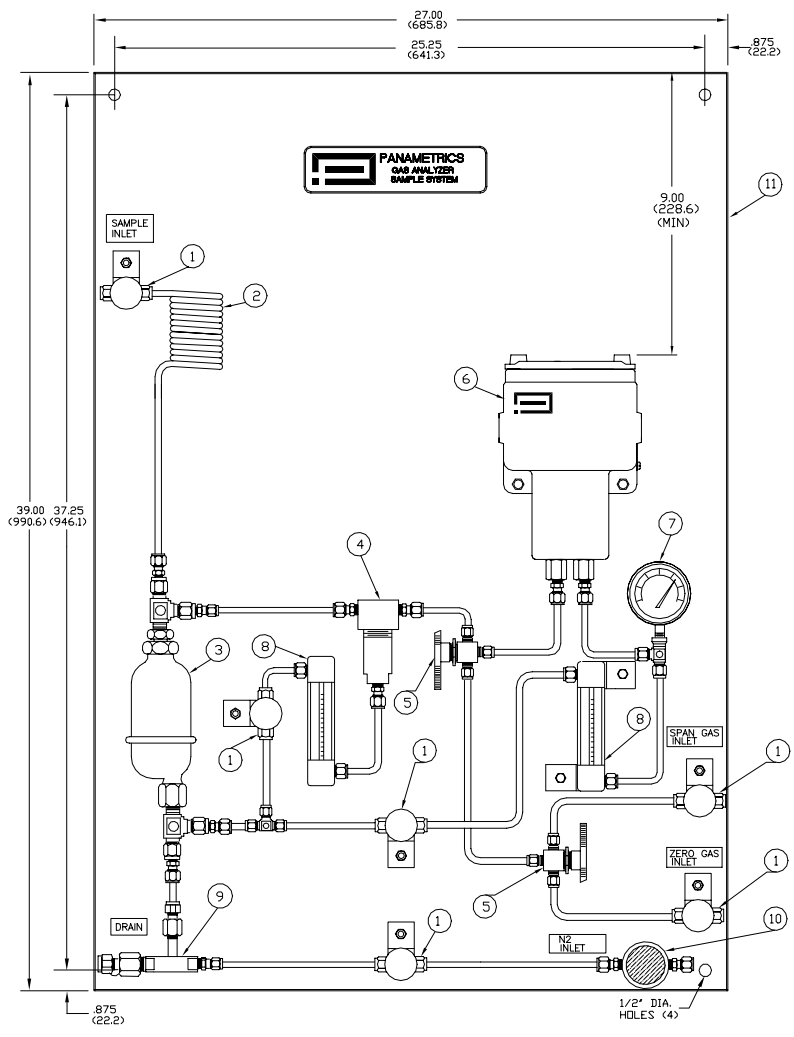

NOTES:

1. SS32B-0-0-0-0-0
2. PROCESS CONNS: 1/4" TUBE FITTINGS
DRAIN TO TANK CONN: 1/2" TUBE FITTINGS
3. CONDUIT CONNS: 3/4" NPT(F)
4. INCHES
(MM)
5. REF. DWG. 733-025BM

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE FRACTIONS DECIMALS ANGLES ± ∞ .XX ± .01 ± ∞ .XXX ± .005 SURFACE FINISH 125 ✓		PANAMETRICS WALTHAM, MASS. 02154-3497	
DRAWN JNR 3/18/2002 ENGINEER		TITLE STANDARD LOW PRESSURE INERTING SAMPLE SYSTEM	
CHECKED		SIZE C	DRAWING NUMBER 733-025AS
REV 1 ECO		SCALE	REV 1
MODEL NO. 025		DO NOT SCALE DWG SHEET 1 OF 1	

 PANAMETRICS WALTHAM, MA 02453		DRAWN JNR	APPROVED	MODEL NO. SS32B-0-0-0-0-0	TITLE STANDARD LOW PRESSURE INERTING SAMPLE SYSTEM BILL OF MATERIALS	BM 733-025	REV 1	
		CHECKED	RELEASE NO.			SHEET OF		
DWG ITEM	SIZE	PART NO.	DESCRIPTION	NOTE OF REF DESC.	QTY PER ASSY (GP)			
					-01			
1		035	NEEDLE VALVE	5000 PSIG MAX, 316 S.S.	6			
2		055	COOLING COIL	¼" 300 SERIES S.S.	1			
3		LD	LIQUID DUMP	¾" INLET, ½" OUTLET, 400 PSIG MAX, 300 SERIES S.S.	1			
4		190	FILTER	5000 PSIG MAX, 316 S.S., BOROSILICATE GLASS ELEMENT	1			
5		040	3 WAY BALL VALVE	2500 PSI MAX, 316 S.S.	2			
6		TMOW/XMOW	THERMOPARAMAGNETIC OXYGEN ANALYZER	WEATHERPROOF MODEL TMO2/XMO2	1			
7		135K	PRESSURE GAUGE	2-1/2" GAUGE, 316 S.S. , 0 TO 30 IN HG (VAC) / 0 TO 15 PSIG	1			
8		095E	FLOWMETER	200 PSI MAX, 316 S.S., 0.2 TO 2.0 SCFH	2			
9		160	EDUCTOR	3000 PSIG MAX, 316 S.S.	1			
10		114B	PRESSURE REGULATOR	3000 PSI MAX, 316 S.S. & TEFLON, 0 TO 25 PSIG OUTLET	1			
11		175	PLATE	39"H x 27"W, WHITE ENAMEL PAINTED STEEL	1			

REV	ECN NO.	DATE/APPD	REV	ECN NO.	DATE/APPD	REV	ECN NO.	DATE/APPD	NOTES
1									OXYGEN CELL INSTALLED IN SAMPLE SYSTEM BUT SOLD SEPARATELY 733-025AS