

## Applications

Explosion-proof display/controller for use with:

- XMO2 thermoparamagnetic oxygen transmitter
- XMTC thermal conductivity hydrogen/gas transmitter
- Any other 4 to 20 mA output transmitter

## Features

- Explosion-proof for Class I, Division 1, Group B,C&D hazardous areas
- Flameproof  
⊕ II 2 GD EEx d IIC T6 T85°C
- Infrared (IR) through-the-glass keypad
- Universal AC input
- 24 VDC power supply for XMO2, XMTC or O2X1
- Software for measurement of percent or ppm oxygen or hydrogen

- Three-curve software for hydrogen-cooled generator
- Programmable process relay contacts

## XDP Explosion-Proof Display

The XDP explosion-proof display provides the measurement of percent or ppm oxygen or hydrogen gas. The explosion-proof XDP is certified for use in Class I, Division 1, Groups B,&D, and ⊕ II 2 GD EEx d IIC T6 hazardous areas.

The XDP features advanced microprocessor-based electronics, an infrared, through-the-glass keypad, a universal power supply (85 to 264 VAC), one 0/4 to 20 mA or 0 to 2 VDC analog output, four process alarms, and a fault alarm.

## Auto-verification/Auto-calibration

The XDP provides long-term, hands-off operation with this optional feature. When initiated, the XDP controls solenoid valves in the sample system to bring zero and span gases to the transmitter. Then the XDP software compares calibration gas readings with factory data to verify proper calibration. If an adjustment is necessary, the XDP makes corrections automatically and notifies the user via the front panel display and alarm contacts.

# XDP Panametrics Explosion-Proof Display

XDP is a Panametrics product. Panametrics has joined other GE high-technology sensing businesses under a new name—GE Industrial, Sensing.



# XDP Specifications

## Functional

### Analog Output

Linearized isolated 4 to 20 mA, 0 to 20 mA or NAMUR user-selectable, field-programmable output for any range from 0 to 100 percent or 0 to 10,000 ppm.

### Input Power

85 to 264 VAC, 47 to 63 Hz, 40 W

### Fuse

1.25 A

### Analog Input

4 to 20 mA

### Output Power Supply

24 VDC  $\pm$ 2 VDC at 1.2 Amp

### Ambient Temperature Range

14°F to 140°F (-10°C to 60°C)

### Keypad

Infrared, through the glass, six keys

### Display


Four-line, backlit liquid crystal display

### Display Accuracy

$\pm$ 0.25% of full scale

### Relay Outputs

- Contact ratings: 2 A, 28 VDC, SPDT
- Programmable as fail-safe or nonfail-safe

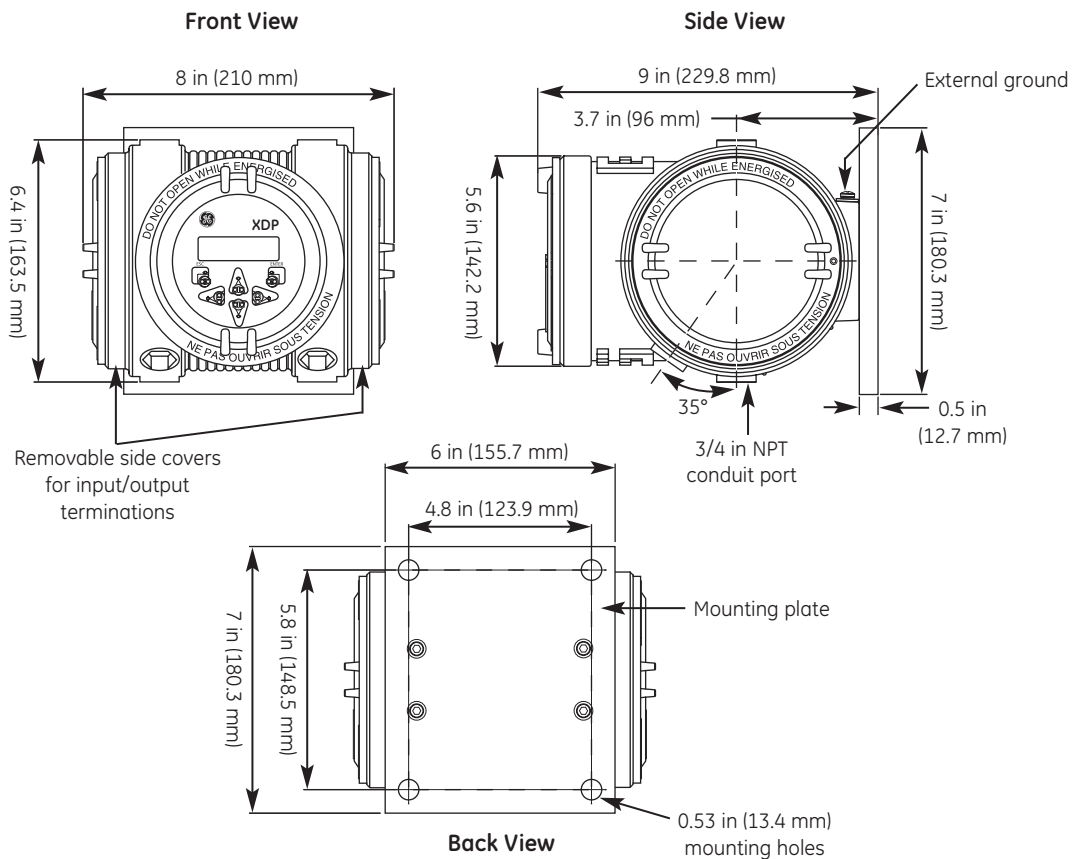

XDP dimensions in inches (mm)

# XDP Specifications

## Standard Software for O<sub>2</sub> Analysis

### Measurement Range Examples

- 0 to 10; 100; 1,000; or 10,000 ppm O<sub>2</sub>
- 0% to 1%; 10%; 21%; 25%; or 100% O<sub>2</sub>

### Relays

- Four process alarms
- One fault alarm
- Two automatic calibration contacts
- Two calibration alarms

## Hydrogen-Cooled Generator Software

### Three Ranges

- 0% to 100% H<sub>2</sub> in air
- 0% to 100% H<sub>2</sub> in CO<sub>2</sub>
- 0% to 100% air in CO<sub>2</sub>

### Relays

- Two process alarms
- One fault alarm
- One normal alarm

## Physical

### Dimensions (w x h x d)

9 in x 10 in x 9 in. (229 mm x 254 mm x 229 mm)

### Weight

15 lb (6.8 kg)

### Environmental

- Weatherproof enclosure Type 4X/IP66
- Explosion-proof Type 7 enclosure:  
FM/CSA Class I, Division 1, Group B,C&D
- Flameproof: KEMA 01ATEX2128  
⊠ Ex II 2 GD EEx d IIC T6 T85°C

### European Compliance

Complies with EMC Directive 89/336/  
EEC, 73/23/EEC LVD (Installation Category II, Pollution  
Degree 2)

### Conduit Entry

Six 1/2 in NPTF conduit ports

### Mounting Holes

Four 3/8 in (10 mm) holes

## Order Information

Record selected option in blank indicated at bottom of form.

### XDP Explosion-proof Display for Use with XMO2, XMTC and O2X1

	<b>Package</b>
2	Explosion-proof/weatherproof enclosure
	<b>Power</b>
1	100 VAC
2	115 VAC
3	230 VAC
4	240 VAC
	<b>Keypad</b>
1	IR keypad
	<b>Configuration</b>
1	Standard
2	Hydrogen-cooled generator

XDP - \_ \_ \_ \_ Use this number to order product

GE  
Sensing



©2005 GE. All rights reserved.  
920-028C

All specifications are subject to change for product improvement without notice.  
GE® is a registered trademark of General Electric Co. Other company or product names mentioned in this document may be trademarks or registered trademarks of their respective companies, which are not affiliated with GE.

**EX-CALIBRA**

Autoryzowany dystrybutor

GE Measurement & Control Solutions

41-400 Mysłowice, ul. Portowa 25

tel.: 32 2239280, fax: 32 2239281

e-mail: [ex-calibra@ex-calibra.pl](mailto:ex-calibra@ex-calibra.pl)

Internet: [www.ex-calibra.pl](http://www.ex-calibra.pl)



[www.gesensing.com](http://www.gesensing.com)