



Part of GE's Sensing & Inspection Technologies business

RHE 07/RHE 08

Rheonik advanced transmitters

RHE 07 Features

- Rack mounting version
- Built in barriers to allow operation with meter in hazardous area: ATEX Approval Ex II (1) G [EEx ia] IIC or cCSAus - Class 1, Div 2, Gr ABCD
- Two analog outputs (0/4 - 20/22 mA)
- One pulse/frequency output - 2 inputs
- Available in all common supply voltages
- Multifunctions (density, brix, concentration, etc.)
- Available with RS 422/485/232
- Enclosure rating: IP 20/Type 1
- Power consumption: < 15 W
- Temperature range: -40°C to 60°C (-40°F to 140°F)
- NMI custody transfer approved version available (TC 3382) with double pulse output
- Batch control




RHE 08 Features

- Wall mounting version
- Built in barriers to allow operation with meter in hazardous area: ATEX Approval Ex II (1) G [EEx ia] IIC or cCSAus - Class 1, Div 2, Gr. BCD
- Two analog outputs (0/4 - 20/22 mA)
- One pulse/frequency output - 2 inputs
- Available in all common supply voltages
- Multifunctions (density, brix, concentration, etc.)
- Version available with RS 422/485/232 HART interface
- Enclosure rating: IP 65/Type 4X
- Power consumption: < 15 W
- Temperature range: -40°C to 60°C (-40°F to 140°F)
- Batch Control
- NTEP (US Weight & Measures) Approval



imagination at work


RHE 07 Specifications

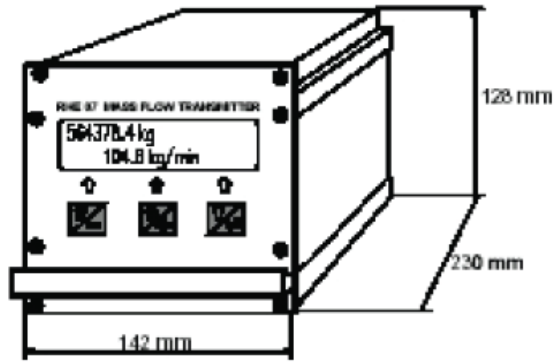

RHE 07 Specifications

Housing	1/3, 19 in rack module (**)
Enclosure rating	IP 20
Dimensions	142 mm x 128 mm x 230 mm (5.60 in x 5.04 in x 9.06 in)
Op. temperature	-40°C to 60°C (-40°F to 140°F)
Display	LCD (16 characters, 2 lines)
Servicing	via 3 pushbuttons for all settings
Outputs(*)	2 analog outputs 1 frequency/pulse output 3 digital outputs (Limit, direction, errors)
Inputs(*)	2 inputs (hold, reset, zero)
Power supply	230 VAC +/- 10% or 115 VAC +/- 10% or 24 VDC
Serial Interface	RS 422/485/232 - optional
Weight	approx. 1.9 kg/4.2 lb

RHE 08 Specifications

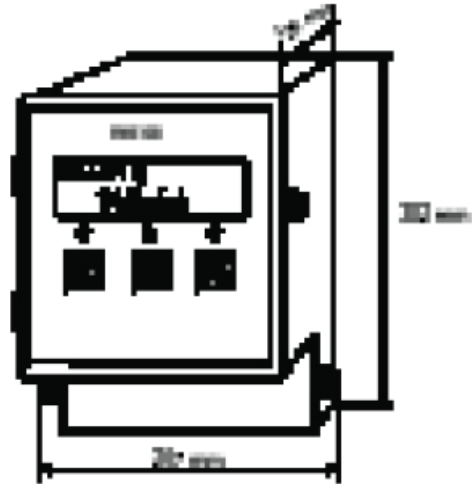

Details RHE 08


Housing	Aluminium (wall mounting)
Enclosure rating	IP 64
Dimensions	302 mm x 207 mm x 128 mm (11.89 in x 8.15 in x 5.04 in)
Op. temperature	-40°C to 60°C (-40°F to 140°F)
Display	LCD (16 characters, 2 lines)
Servicing	via 3 pushbuttons for all settings
Outputs(*)	2 analog outputs 1 frequency/pulse output 3 digital outputs (Limit, direction, errors)
Inputs(*)	2 inputs (hold, reset, zero)
Power supply	230 VAC +/- 10% or 115 VAC +/- 10% or 24 VDC
Cable entries	4 x M25 x 1.5 - others optional
Serial Interface	RS 422/485/232 - optional HART - optional
Weight	approx. 4.7 kg/10.4 lb

(*) In/outputs via open collector optocouplers.
For details see wiring diagrams.

(**) NMI custody transfer version ½, 19" rack module

RHE 07 Ordering Information

RHE 07

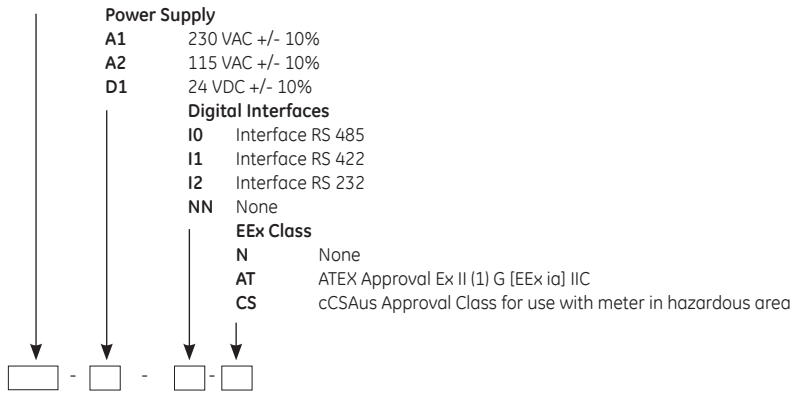


I.e.: RHE 07 A1 NN AT

(*) Standard configuration includes:

2 analog outputs, 1 pulse/frequency output, 3 digital outputs, 2 inputs (see wiring diagram for details).

RHE 08 Ordering Information

RHE 08

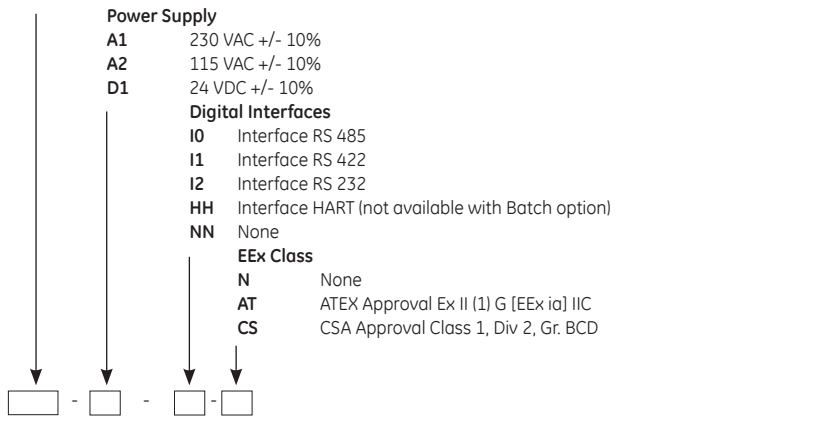

I.e.: RHE 08 A1 NN AT

(*) Standard configuration includes:

- 2 analog outputs, 1 pulse/frequency output, 3 digital outputs, 2 inputs (see wiring diagram for details).

- 4 cable entries M25 x 1.5. Others (1/2" NPT-F, 3/4" NPT-F and M20 x 1.5) available on request.

Note: Transmitter must be installed in safe area



EX-CALIBRA

Autoryzowany dystrybutor

GE Measurement & Control Solutions

41-400 Mysłowice, ul. Portowa 25

tel.: 32 2239280, fax: 32 2239281

e-mail: ex-calibra@ex-calibra.pl

Internet: www.ex-calibra.pl

www.gesensinginspection.com

920-000-2