



Part of GE's Sensing &
Inspection Technologies business

RHE 15

Profibus DP Module


Features

- Compact plastic housing
- DIN rail mounting
- For use in safe area
- 1 pulse input (active/passive)
- 3 additional analog inputs (active)
- Power consumption: 2 W to 3 W
- Temperature range: -40°C to 65°C (-40°F to 149°F)
- Enclosure rating: IP 20
- Power Supply: 8 VDC to 28 VDC
- For use with RHE 14.
- Configuration via Profibus DP (master) or via RS 232 (terminal program)



imagination at work

RHE 15 Specifications

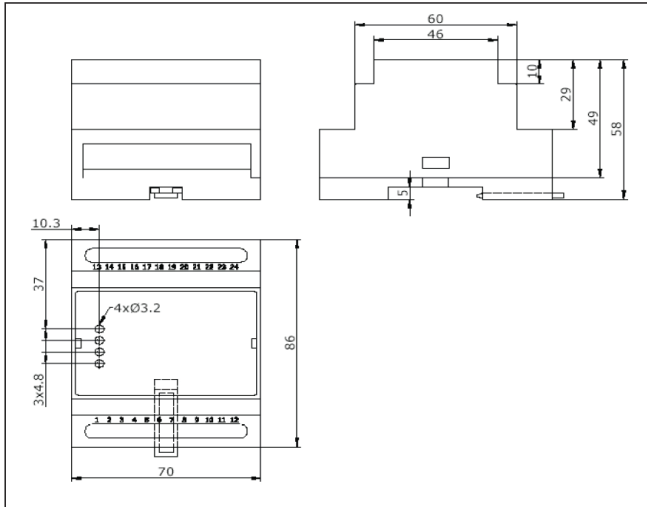

RHE 15

T1 Standard Version
 D1 8 VDC to 24 VDC Power Supply
 N No Options

RHE 15 - - -

RHE 15

Housing	PC/PPO
Enclosure rating	IP 20
Dimensions	70 mm x 86 mm x 58 mm (2.76 in x 3.39 in x 2.28 in)
Op. temperature	-40°C to 65°C (-40°F to 149°F)
Inputs	1 pulse input (active/passive) 3 analog inputs (0-20 mA)
Power supply	8 VDC to 28 VDC
Interface	RS 232
Weight	approx. 200 gr./0.44 lb



EX-CALIBRA

Autoryzowany dystrybutor
 GE Measurement & Control Solutions

41-400 Mysłowice, ul. Portowa 25
 tel.: 32 2239280, fax: 32 2239281
 e-mail: ex-calibra@ex-calibra.pl
 Internet: www.ex-calibra.pl

www.gesensinginspection.com

920-000-2